




2022

CATALOGO PRODOTTI
PRODUCTS CATALOG
CATALOGUE PRODUITS
CATALOGO PRODUCTOS

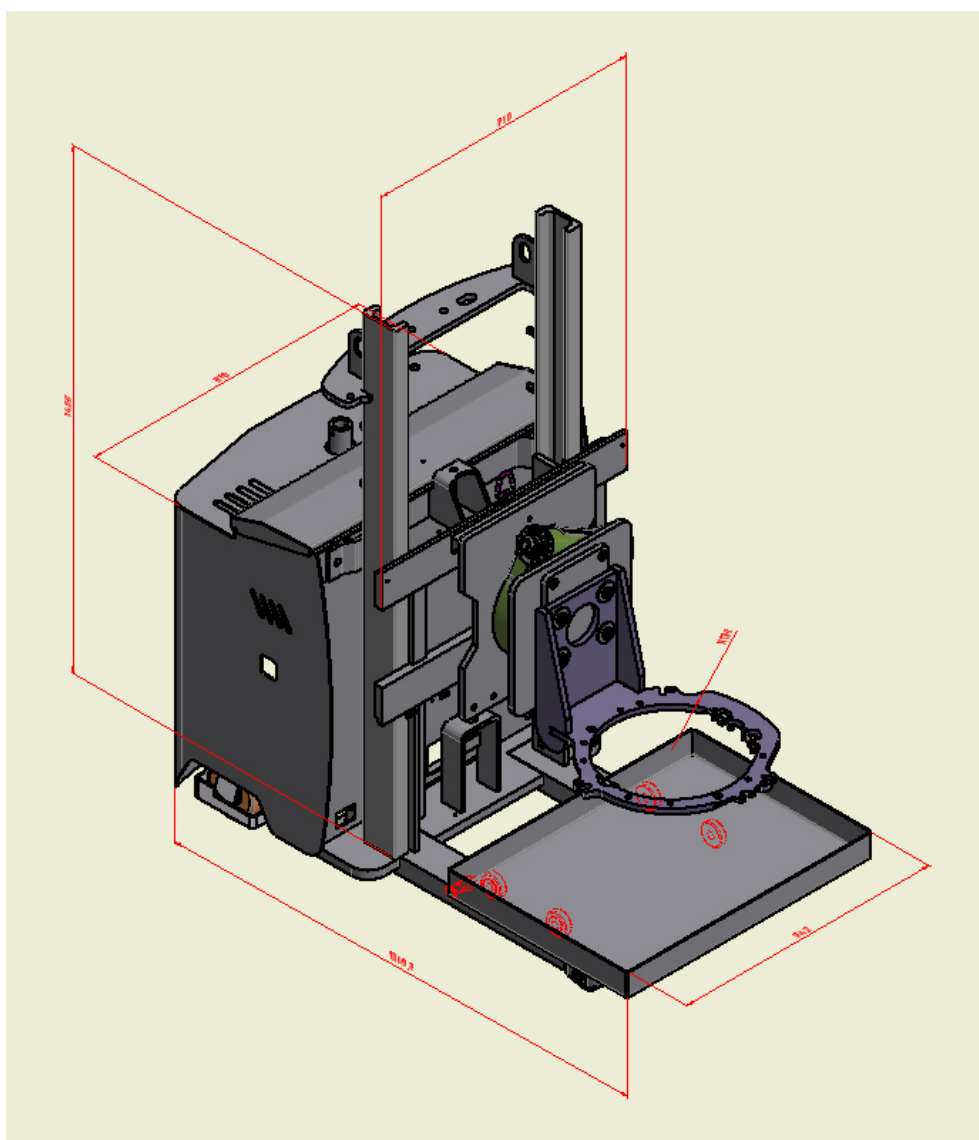

ABL : Elevatore semi elettrico Multiuso. Altezza sollevamento 880mm o 1480mm

Batterie Gel 24V e Caricabatterie alta frequenza a bordo

ABL : Multi function semi electric Stacker – Lifting height 880mm or 1480mm

24V Gel Batteries and high frequency built in charger

ABL : Gerbeur semi électrique Polyvalent – Hauteur de levée 880mm ou 1480mm

Batteries Gel 24V et chargeur haute fréquence incorporé

ABL : Apilador semi electrico Multiusos – Altura de elevación 880mm o 1480mm

Baterias Gel 24V y cargador alta frecuencia integrado

Mod.	Cap.Kg	Layout	Mod.	Cap.Kg	Layout
ABL - FOR	300		ABL - CBR	200	
ABL - PCN	300		ABL - SPT	200	
ABL - CBL	300		ABL - RUL	200	
ABL - CBT	300		ABL - ASC	200	
ABL - SAB	300		ABL - BGF	200	

ABL 03 CBT



ABL 02 ASC



ABL 03 SAB



ABL 03 - CBL



ABL 02 - SPT



ABL 02 - PUNT





ABL- ARB



ABL ARB

hO	150	205	260	Q1	200 kg
hV	1640	1695	1750	Q2	150 kg
				Q3	120 kg
				Q4	90 kg
				Q5	70 kg

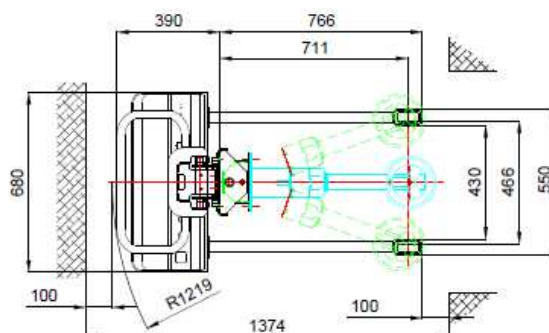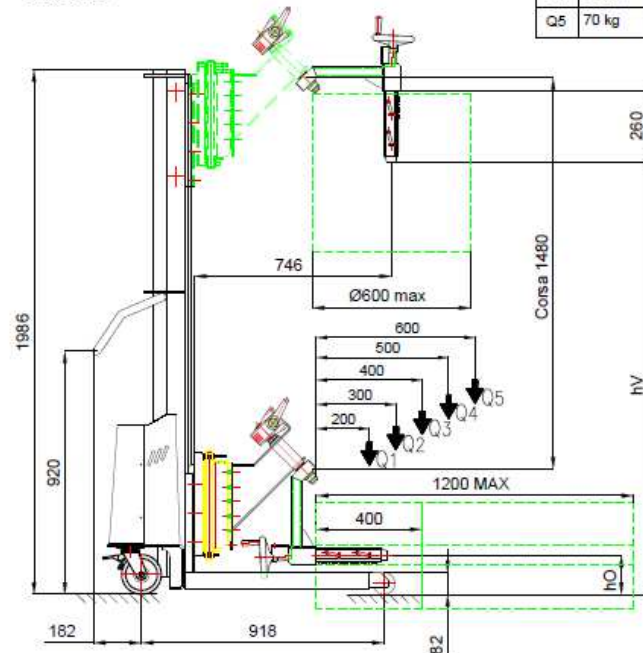

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS		ABL-ARB	ABL-MRB
Modello	Manufacturer's type	Modèle	Modelo		160	200
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	160	200
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	300	300
Peso con batteria	Service weight incl. Battery	Poids avec batterie	Peso propio con batería	kg	180	215
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		PU / PU	PU / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas delanteras	mm	82 x 40	82 x 40
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm		
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	150 x 40	150 x 40
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrice)	Cantidad (x=motrices)	Nr.	2 + 2	2 + 2
MOTORE	E-MOTOR	MOTEUR	ACCIONAMENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	MANUAL	MANUAL
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	0,5	0,8
Batteria GEL	GEL Battery	Batterie GEL	Bateria GEL	V/Ah	2 x 12 / 44	2 x 12 / 56
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	26	38
Raddrizzatore	Charger	Chargeur	Cargador	V/A	HF 24V / 10A	HF 24V / 10A

ABL- MRB



CAMERA Option




REMOVABLE ADAPTER Option



hD	295	405	515
hV	1385	1495	1605

Q1	250 kg
Q2	200 kg
Q3	150 kg
Q4	120 kg
Q5	100 kg

ABL MRB

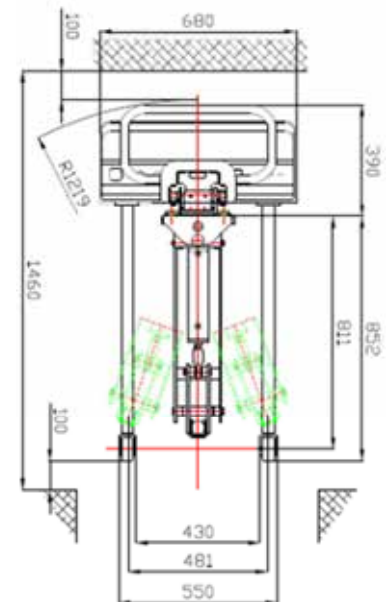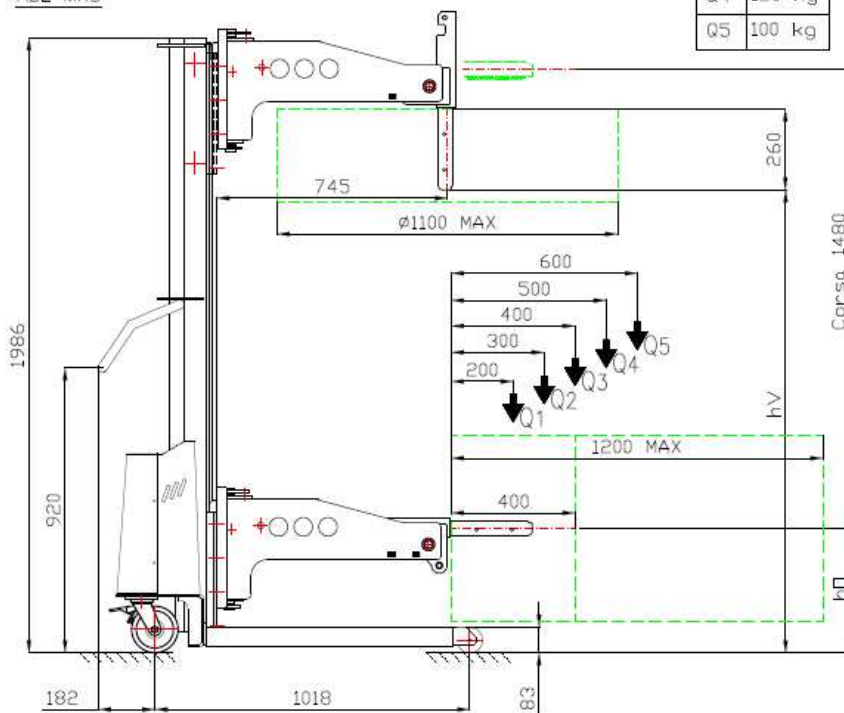

Ø 152





Ø 76

TGE 03 MRB






hO	290	400	510
hV	1465	1575	1685

Q1	300 kg
Q2	250 kg
Q3	200 kg
Q4	160 kg
Q5	130 kg

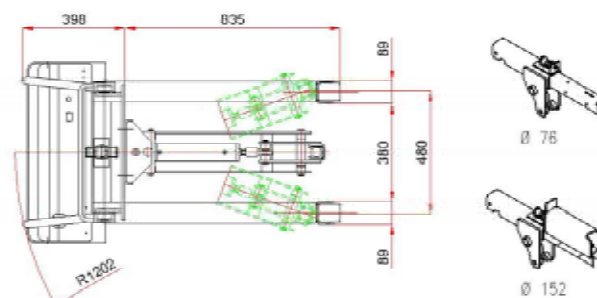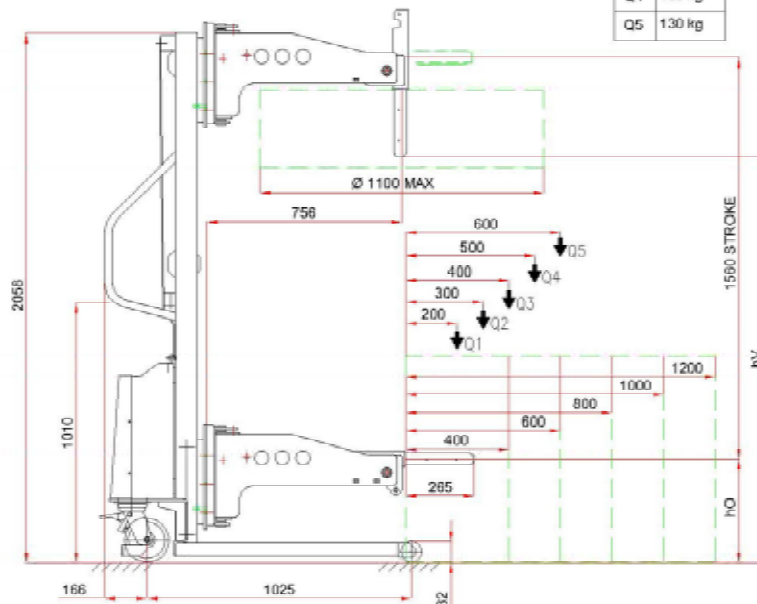

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS			
Modello	Manufactur's type	Modèle	Modelo		TGE - MRB	TGE.Dx MRB
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	250	250
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	300	300
Peso con batteria	Service weight incl. Battery	Poids avec batterie	Peso propio con batería	kg	290	420
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		PU/PU	PU/PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas delanteras	mm	82 x 70	82 x 70
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm		
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	175 x 45	175 x 45
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrice)	Cantidad (x=motrices)	Nr.	2 + 2	2 + 2
MOTORE	E-MOTOR	MOTEUR	ACCIONAMIENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	MANUAL	MANUAL
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	DC 0,8	DC 0,8
Batteria	Battery	Batterie	Bateria	V/Ah	2 x 12V/80Ah	2 x 12V/100Ah
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	48	60
Raddrizzatore	Charger	Chargeur	Cargador	V/A	HF 24V/10A	HF 24V/10A

TGE Dx. MRB

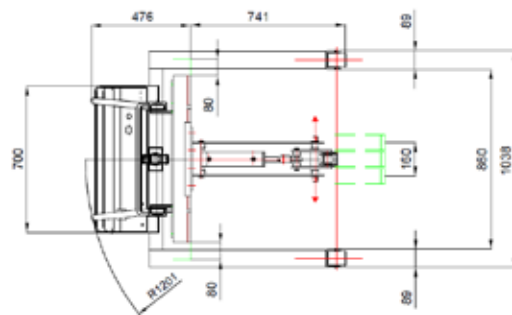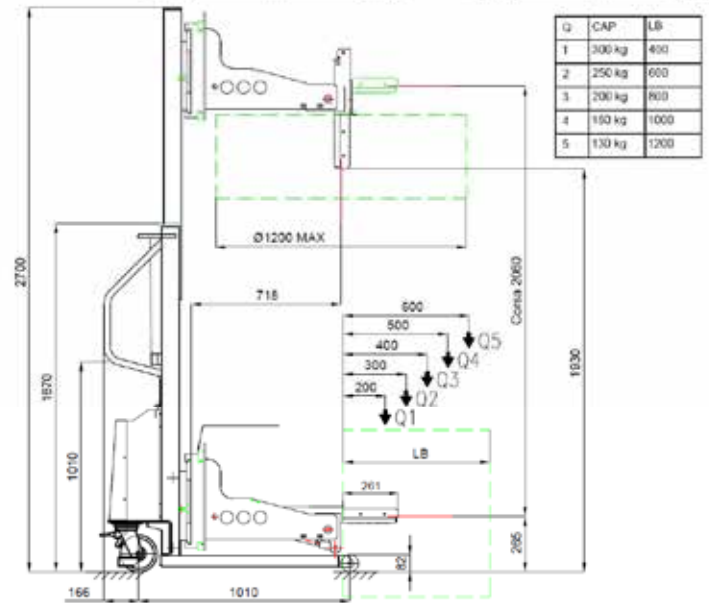

OPTIONS

REMOVABLE ADAPTER



CONE EFFECT CLAMP



CAMERA + SCREEN







TGE-PMF



TGE-ROT

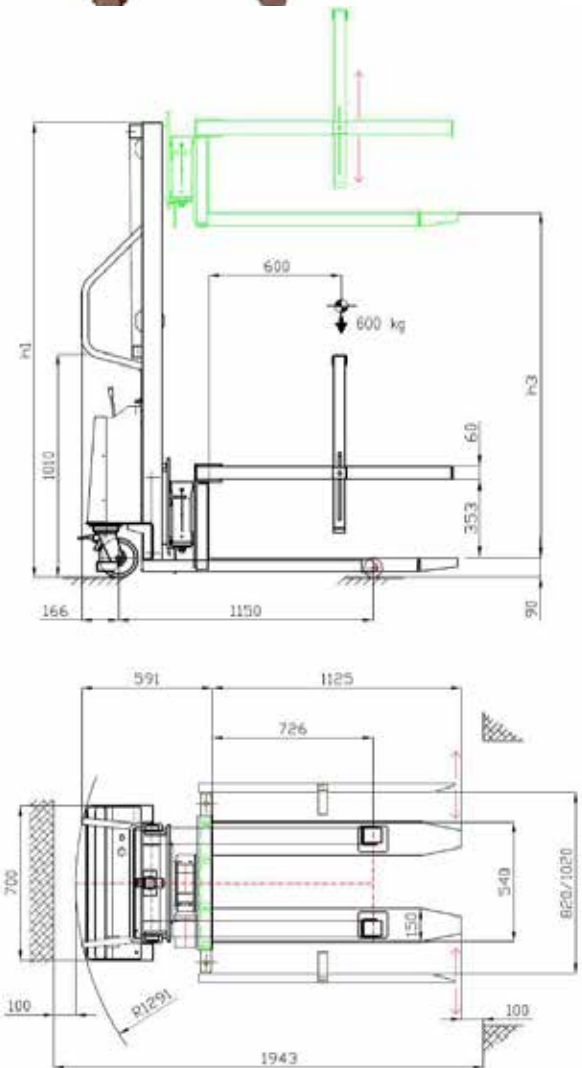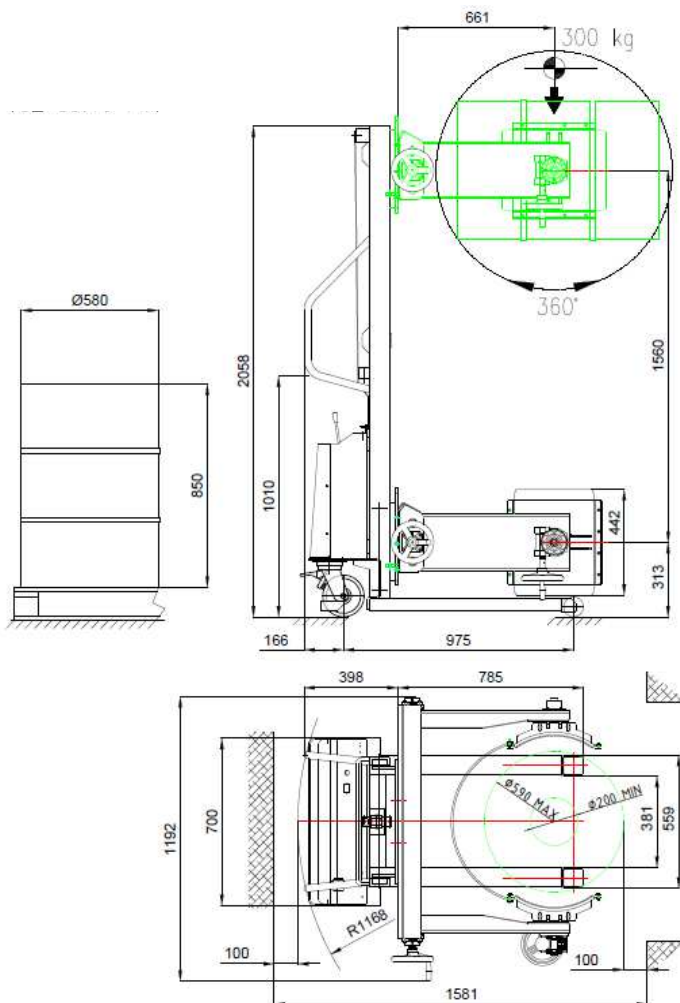

TGE-MOR



TGE-PMC



TGE-BGF



TGE-PFB




TGE-SAB



TGE-CBB



CB 03 MRB

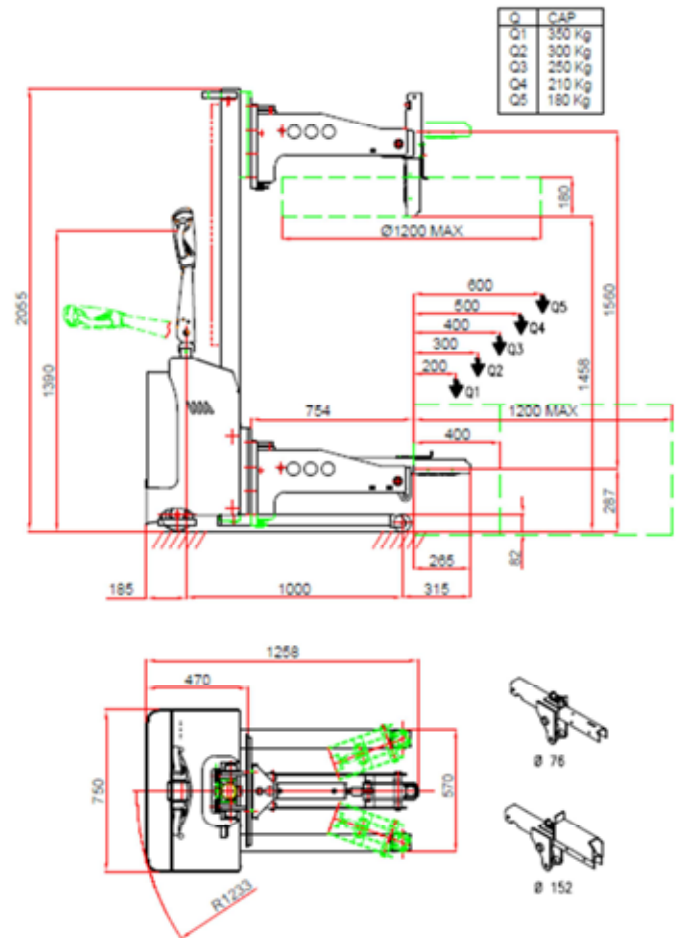

OPTIONS : REMOVABLE ADAPTER – ADDITIONAL CLAMP


IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS			
Modello	Manufactur's type	Modèle	Modelo		CB 03 MRB	CB 08 CBB
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	300	800
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	300	600
Peso con batteria	Service weight incl. batt.	Poids avec batterie	Peso propio con batería	kg	480	490
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		PU / PU	PU / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas del.	mm	82 x 70	82 x 70
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm	186 x 60	250 x 80
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	100 x 40	100 x 40
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrices)	Cantidad (x=motrices)	Nr.	2 / 2 + 1x	2 / 2 + 1x
MOTORE	E-MOTOR	MOTEUR	ACCIONAMIENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	PM 0,4	PM 0,70
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	DC 0,8	DC 0,8
Batteria	Battery	Batterie	Batería	V/Ah	2 x 12V/100Ah	2 x 12V/100Ah
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	60	60
Raddrizzatore	Charger	Chargeur	Cargador	V/A	HF 24V/10A	HF 24V/10A

CB 08 CBB



CB-08 CBB

	mm	mm	mm	mm
h3	560	1060	1560	1860
h1	1055	1555	2055	2355

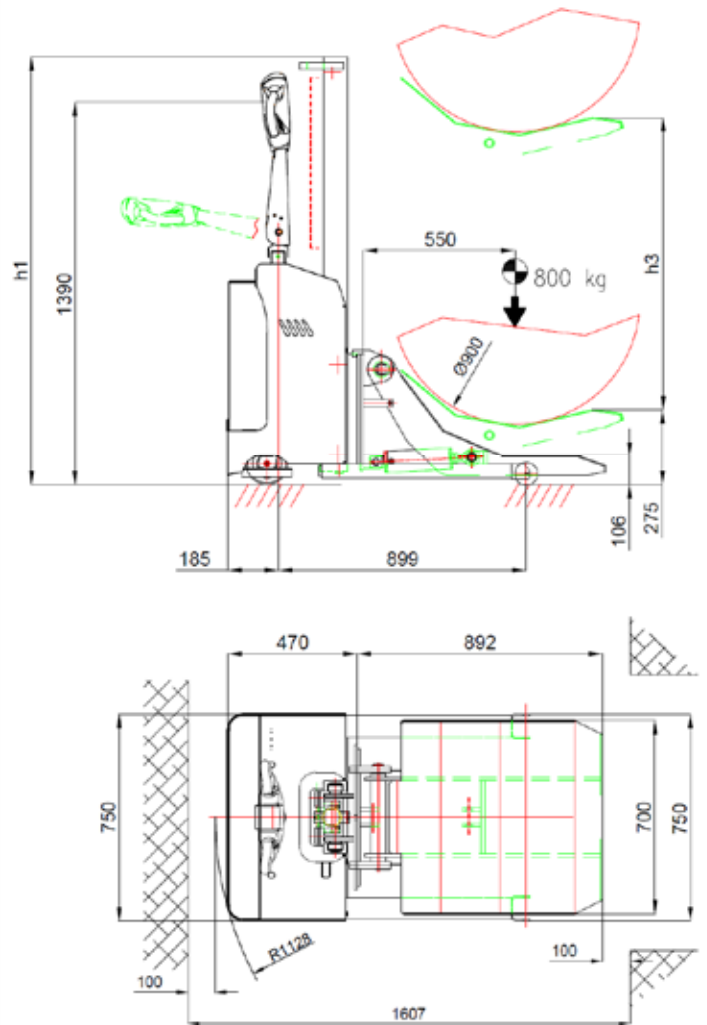

← **Option**
BATTERIA LITIO
LITHIUM BATTERY

CL 04 MRB






Opzione ADATTATORE
ADAPTER Option



CL 04.25 MRB T6

Q	CAP	LM	LF	HM	HB
1	450	280	400	2337	2200
2	400	280	600	2337	2000
3	320	280	800	2337	1800
4	250	360	1000	2237	1600
5	200	360	1200	2237	1400

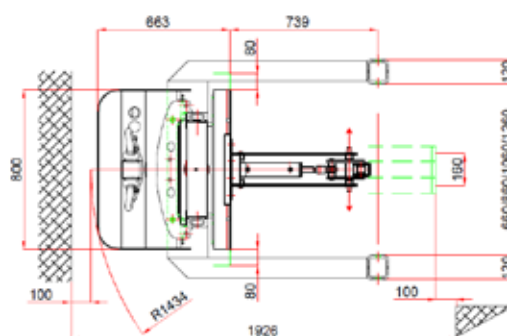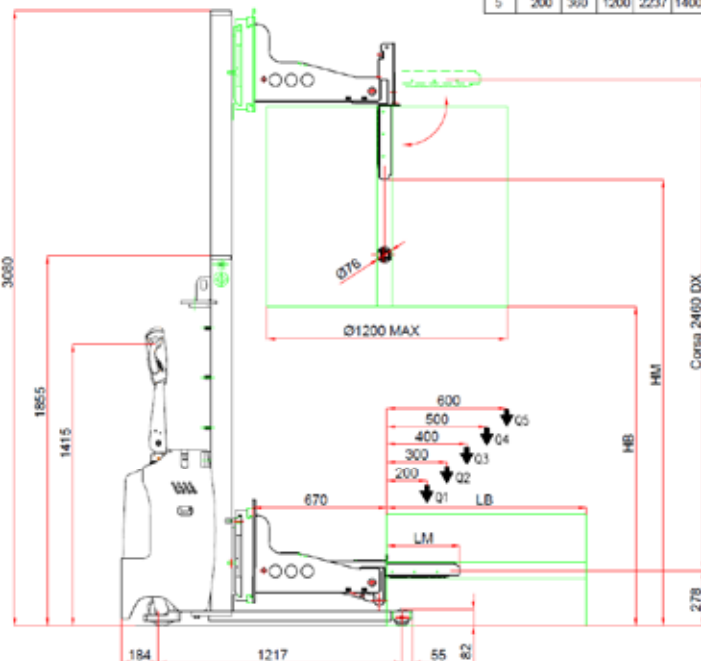



IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS			
Modello	Manufactur's type	Modèle	Modelo		CL 04 MRB	CL 12 CBB
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	400	1200
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	300	600
Peso con batteria	Service weight incl. batt.	Poids avec batterie	Peso propio con batería	kg	730	750
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		PU / PU	PU / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas del.	mm	82 x 90	82 x 90
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm	250 x 80	250 x 80
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	150 x 50	150 x 50
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrice)	Cantidad (x=motrices)	Nr.	2 / 2 + 1x	2 / 2 + 1x
MOTORE	E-MOTOR	MOTEUR	ACCIONAMENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	PM 0,7	PM 0,7
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	DC 2,0	DC 2,0
Batteria	Battery	Batterie	Bateria	V/Ah	24 / 150	24 / 150
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	125	125
Raddrizzatore	Charger	Chargeur	Cargador	V/A	HF 16A	HF 16A

CL 12 CBB



CL CBB

	mm	mm
h3	1160	1560
h1	1675	2075
h4	-	-

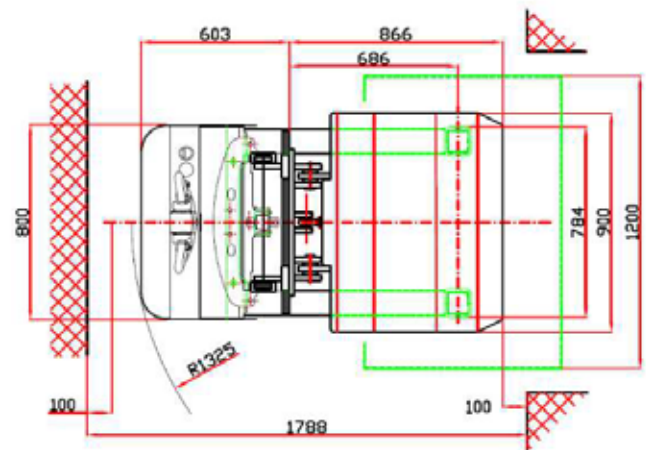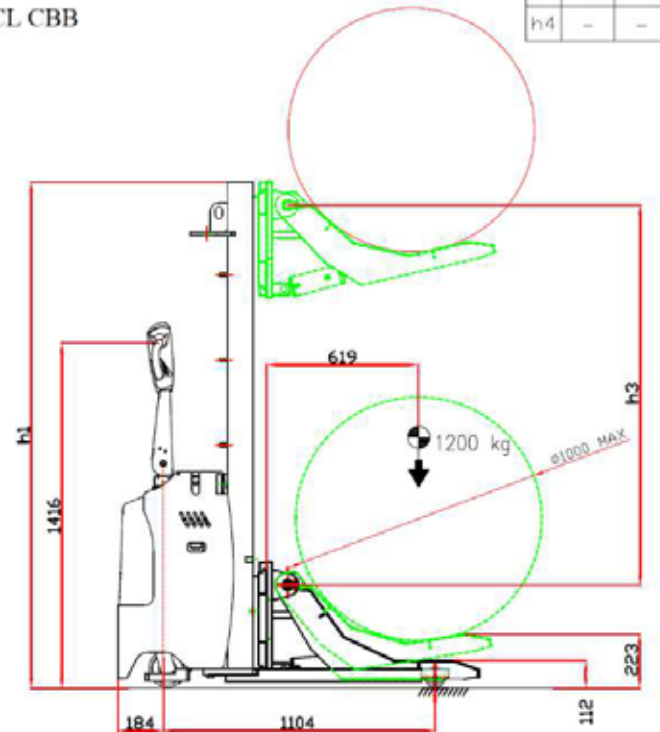

BRANDEGGIO CULLA – TILTING CRADLE





← **Option**
BATTERIA LITIO
LITHIUM BATTERY

CL 03 PRFI



	mm	mm	mm	mm
h3	1160	1560	2080	2480
h1	1675	2075	1650	1850
h4	-	-	2680	3080

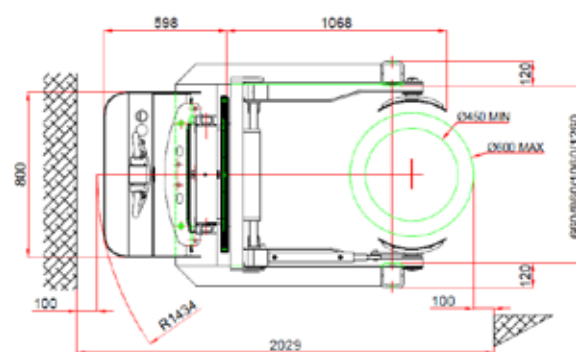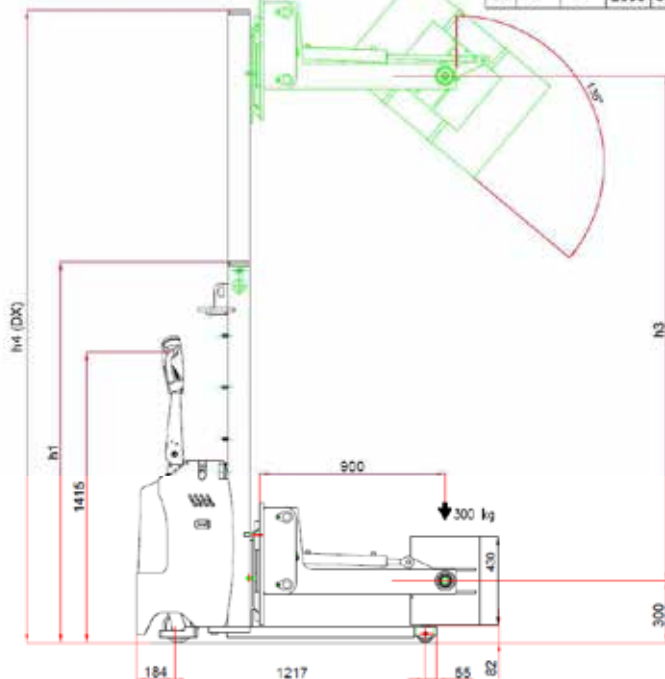

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS			
Modello	Manufacturer's type	Modèle	Modelo		CL 03 PRFI	CLC 03 PRFI
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	300	300
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	900	800
Peso con batteria	Service weight incl. Battery	Poids avec batterie	Peso propio con batería	kg	780	850
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		PU / PU	PU / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas del.	mm	82 x 90	82 x 90
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm	250 x 80	250 x 80
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	150 x 50	150 x 50
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrice)	Cantidad (x=motrices)	Nr.	2 / 2 + 1x	2 / 2 + 1x
MOTORE	E-MOTOR	MOTEUR	ACCIONAMIENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	PM 0,7	PM 0,7
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	DC 2,0	DC 2,0
Batteria	Battery	Batterie	Bateria	V/Ah	24 / 150	24 / 150
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	125	125
Raddrizzatore	Charger	Chargeur	Cargador	V/A	HF 16A	HF 16A



PBLI



CP 08 ARB.2



MANDRINO AD ESPANSIONE DIAMETRO 3/6 POLLICI
DOUBLE DIAMETER EXPANDING MANDREL 3/6 INCHES
MANDRIN EXPANSION DOUBLE DIAMETRE 3/6 POUCHES
HUSILLO EXPANSIBLE DIAMETRO DOBLE 3/6 PULGADAS

TRASLATORE – SIDESHIFT – DEPLACEMENT LAT.



OPTION : PINZA – CLAMP – PINCE







CP 08 PBLI



CP 08 GL - PBLI

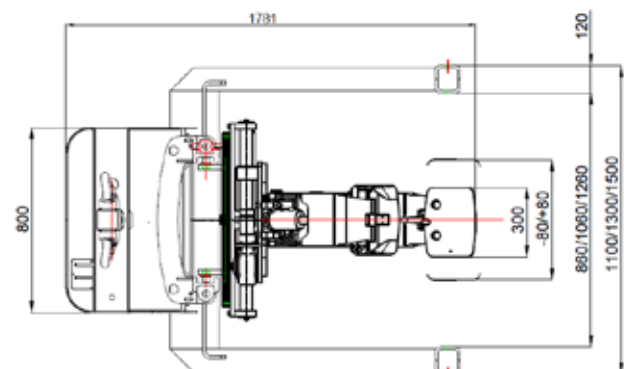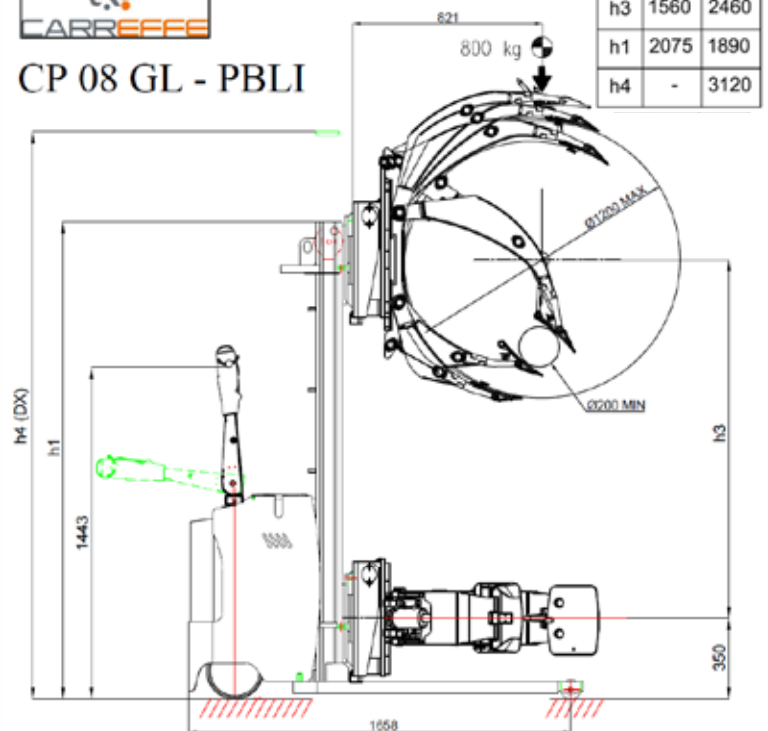





IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS			
Modello	Manufactur's type	Modèle	Modelo		CP 08 PBLI	CP 08 ARB
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	800	800
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	800	300
Peso con batteria	Service weight incl. batt.	Poids avec batterie	Peso propio con batería	kg	880	970
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		PU / PU	PU / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas del.	mm	82 x 90	82 x 90
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm	250 x 100	250 x 100
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	150 x 50	150 x 50
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrice)	Cantidad (x=motrices)	Nr.	2 / 2 + 1x	2 / 2 + 1x
MOTORE	E-MOTOR	MOTEUR	ACCIONAMIENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	ES 1.7	ES 1.7
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	DC 2.0	DC 2.0
Batteria	Battery	Batterie	Bateria	V/Ah	24 / 240	24 / 240
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	210	210
Raddizzatore	Charger	Chargeur	Cargador	V/A	HF 30A	HF 30A

CL 06 PRLI



CARREFFE
CL-06 PRLI


	mm	mm	mm	mm
h3	1160	1560	2060	2460
h1	1675	2075	1650	1850
h4	-	-	2680	3080

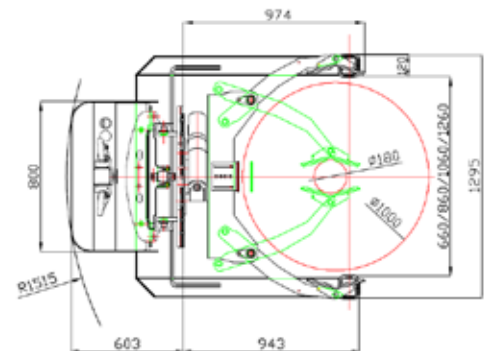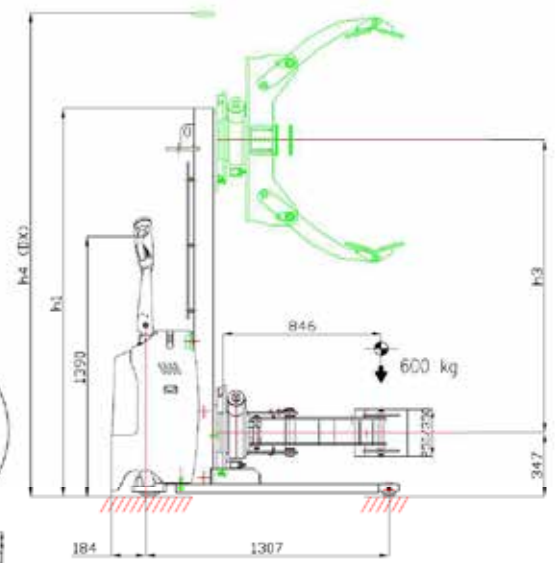

← **Option**
BATTERIA LITIO
LITHIUM BATTERY




CPC 03 FOR

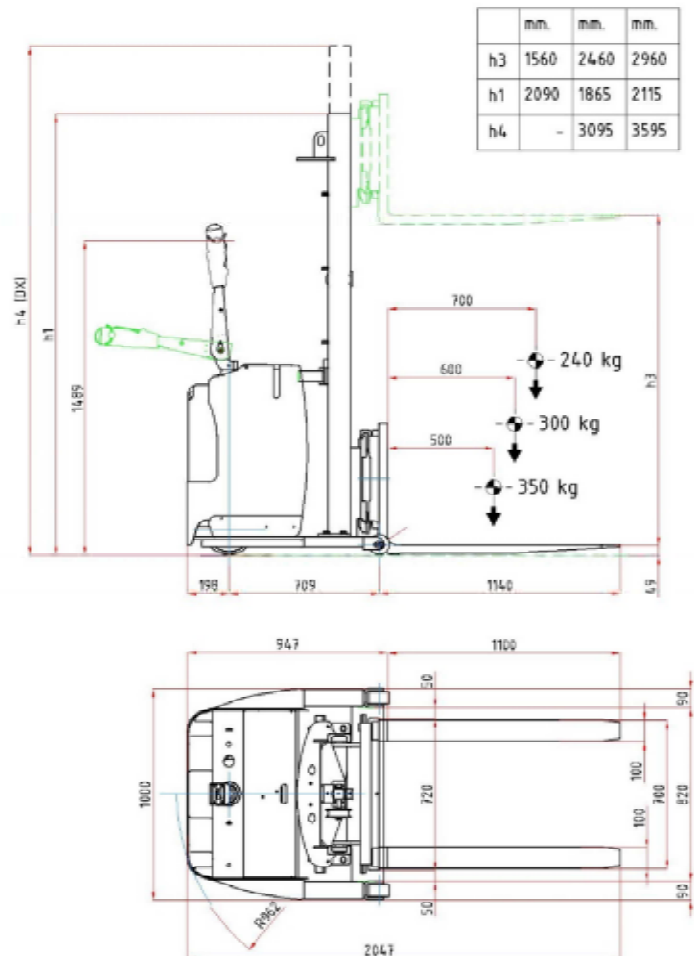

LEAD ACID

LITHIUM







IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS			
Modello	Manufacturer's type	Modèle	Modelo		CL 06 PRLI	CPC 03 FOR
Portata	Load capacity	Capacité	Capacidad de carga	kg	600	300
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	800	600
Peso con batteria	Service weight incl. Battery	Poids avec batterie	Peso propio con batería	kg	860	990
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		PU / PU	PU / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas del.	mm	82 x 90	100 x 60
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm	250 x 80	250 x 100
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	150 x 50	
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrice)	Cantidad (x=motrices)	Nr.	2 / 2 + tx	2 / tx
MOTORE	E-MOTOR	MOTEUR	ACCIONAMIENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	PM 0,7	ES 1,7
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	DC 2,0	DC 2,0
Batteria	Battery	Batterie	Bateria	V/Ah	24 / 150	24 / 240
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	125	210
Raddizzatore	Charger	Chargeur	Cargador	V/A	HF 16A	HF 30A

CPC 03 PRLI



	PRLI	PBLI
h3	1560	2460
h1	2090	1865
h4	-	3095

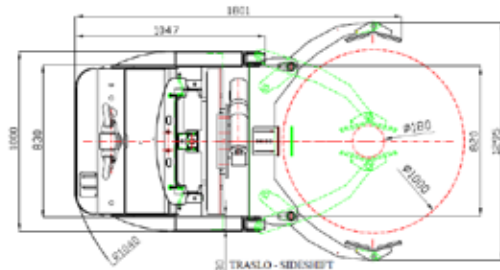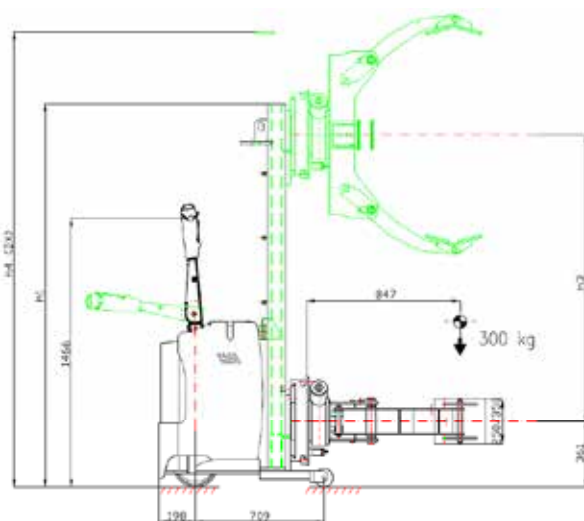

PIOMBO/ACIDO

LITIO (Opzione)

LEAD / ACID

LITHIUM (Option)




IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS			
Modello	Manufacturer's type	Modèle	Modelo		CPC PRLI	CPC PBLI
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	300	300
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	800	800
Peso con batteria	Service weight incl. batt.	Poids avec batterie	Peso propio con batería	kg	180	1260
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		PU / PU	PU / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas del.	mm	100 x 60	100 x 60
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm	250 x 100	250 x 100
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm		
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrice)	Cantidad (x=motrices)	Nr.	2 / 1x	2 / 1x
MOTORE	E-MOTOR	MOTEUR	ACCIONAMENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	ES 1.7	ES 1.7
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	DC 2.0	DC 2.0
Batteria	Battery	Batterie	Bateria	V/Ah	24 / 240	24 / 240
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	210	210
Raddrizzatore	Charger	Chargeur	Cargador	V/A	HF 30A	HF 30A

CPC 03 PBLI



	mm	mm
h3	1560	2460
h1	2090	1885
h4	-	3095

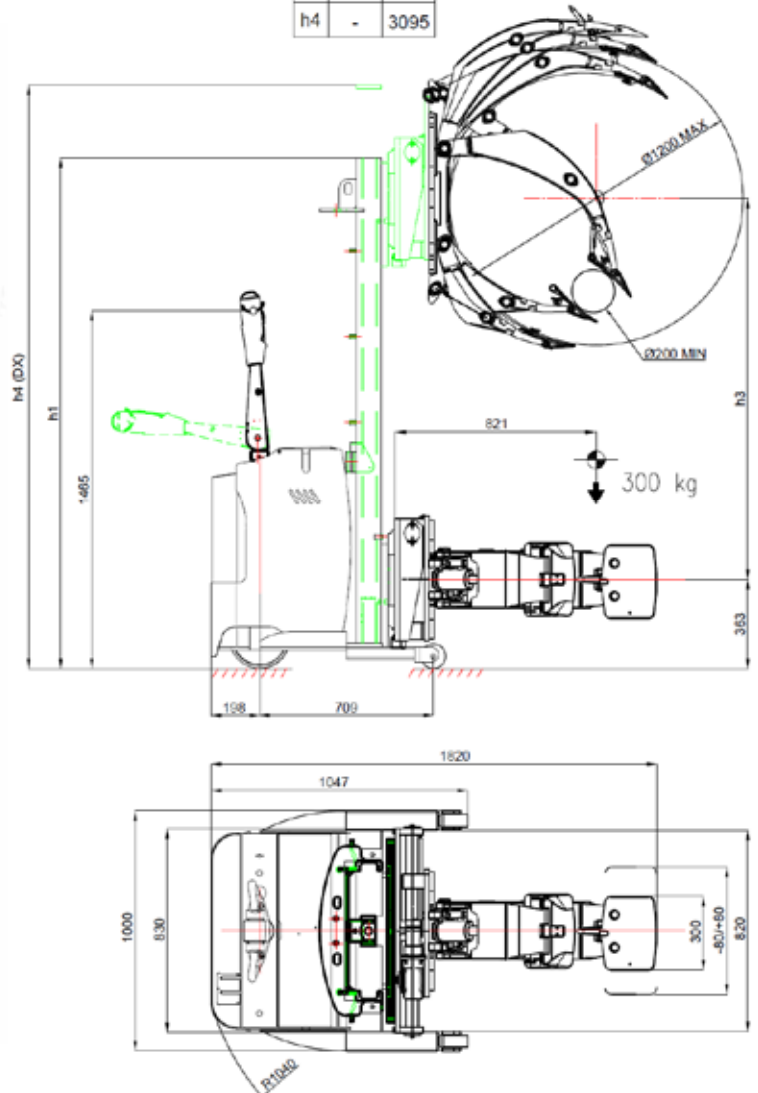



ABM PUNT



ABL AMR



ABL BGF



ABL RCP



CL 08 PCS



CB 03 PFB



CP 20 CBB



CP 12 ROT



CL 02 MOR



CLC 02 PIC



CP 06 BGF



CP 10 PUSH



CP 10 PUSH



CMX 05 BAC



PEX 12 ROT



ABLX CBT



TGX 08 FOR



TGEX 03 ROT



ABLX CBL



ABLX 03 RUL



CPX 06 IBC



CMX 03 PRLI



CPX 15 FEM

ABEX 01
ABLX 03 CBT

FULL ELECTRIC
LITHIUM BATT.




ABLX 03 MRB
ABLX 02 ARB


IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS			
Modello	Manufacturer's type	Modèle	Modelo		ABEX 01	ABLX 03
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	150 / 100	300 / 200
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	400	400
Peso con batteria	Service weight incl. batt.	Poids avec batterie	Peso propio con batería	kg	120	170
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		PU / PU	PU / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas delanteras	mm	50 x 25	82 x 40
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm		
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	125 x 30	150 x 40
N. ruote (x=motrice)	Wheels N. (x=driven)	N. roues (x=motrice)	Cantidad (x=motrices)	N.	2 + 2	2 + 2
MOTORE	E-MOTOR	MOTEUR	ACCIONAMENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	MANUAL	MANUAL
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	GEAR BOX	DC 0,5
Batteria	Battery	Batterie	Bateria	V/Ah	2 x 12/60 Lith	2 x 12/56 GEL
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	11	38
Raddrizzatore	Charger	Chargeur	Cargador	V/A	HF 24V / 10A	HF 24V / 10A

TGEX 08 FOR



	mm	mm
h3	1560	2460
h1	2075	1890
h4	-	3120

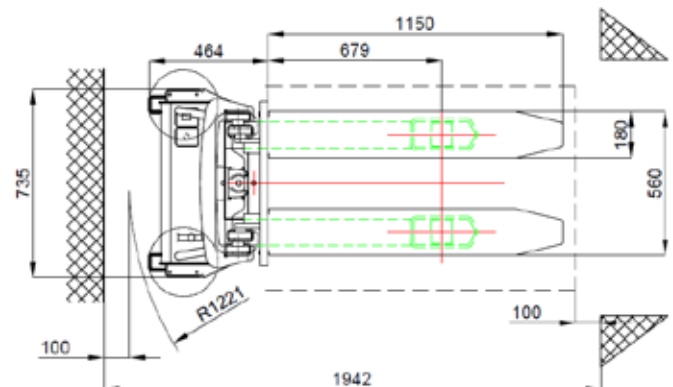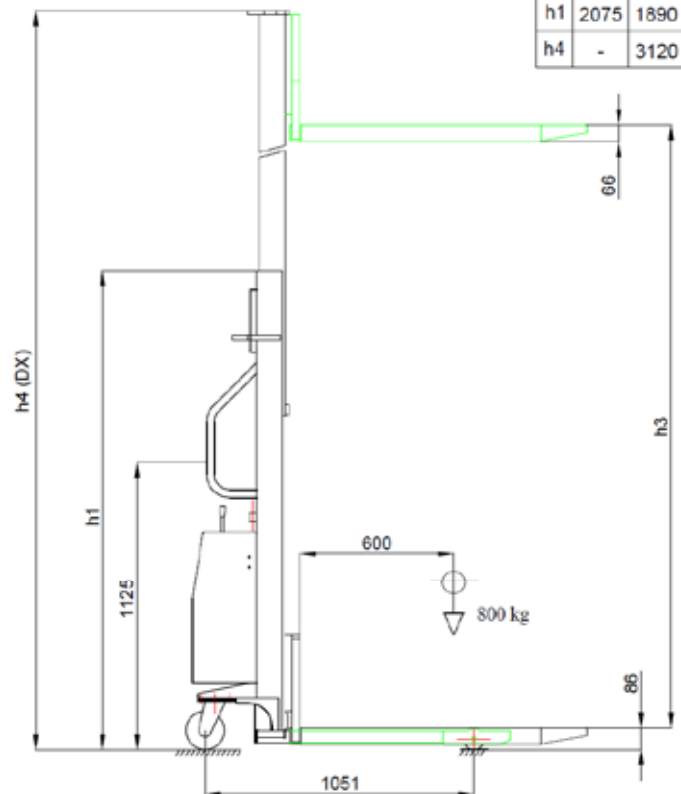

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS		TGEX FOR	TGEX PRLI
Modello	Manufactur's type	Mo dèle	Modelo			
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	800	300
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	600	600
Peso con batteria	Service weight incl. Battery	Poids avec batterie	Peso propio con batería	kg	340 - 390	445
RUOTE/TELA IO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		NY / PU	NY / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas del.	mm	82 x 90	82 x 90
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm		
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	150 x 50	150 x 50
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrice)	Cantidad (x=motrices)	Nr.	2 + 2	2 + 2
MOTORE	E-MOTOR	MOTEUR	ACCIONAMENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	MANUAL	MANUAL
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	DC 0,8	DC 0,8
Batteria GEL	GEL Battery	Batterie GEL	Bateria GEL	V/Ah	2 x 12 / 80	2 x 12 / 100
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	50	64
Raddrizzatore	Charger	Chargeur	Cargador	V/A	HF 24V / 10A	HF 24V / 10A




TGEX PML




TGEX PRLI

	mm	mm
h3	1560	2460
h1	2075	1890
h4	-	3120

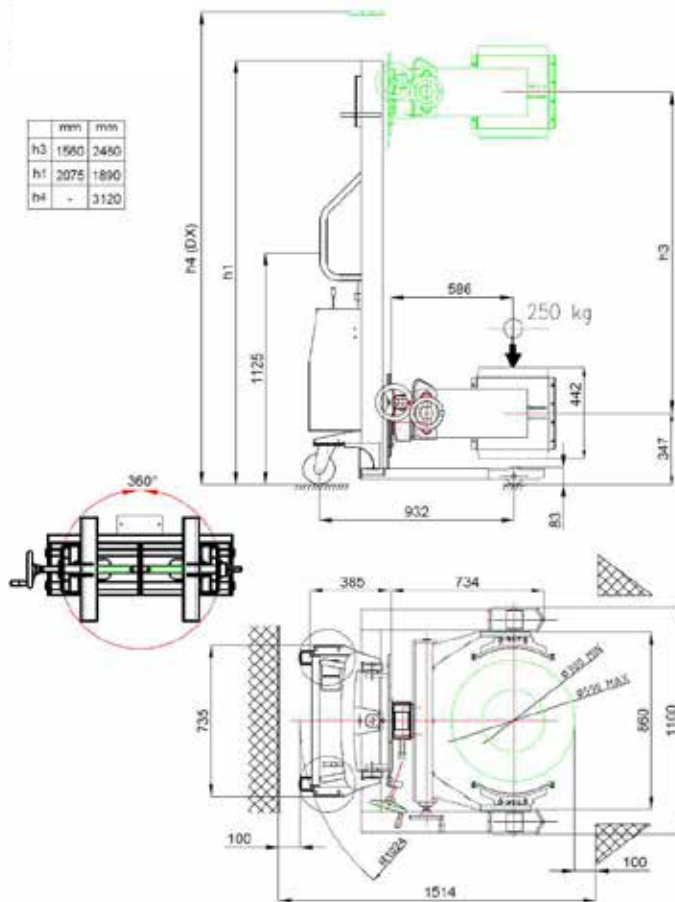

RF
CARREFFE
TGEX PRLI

	mm	mm
h3	1560	2460
h1	2075	1890
h4	-	3120

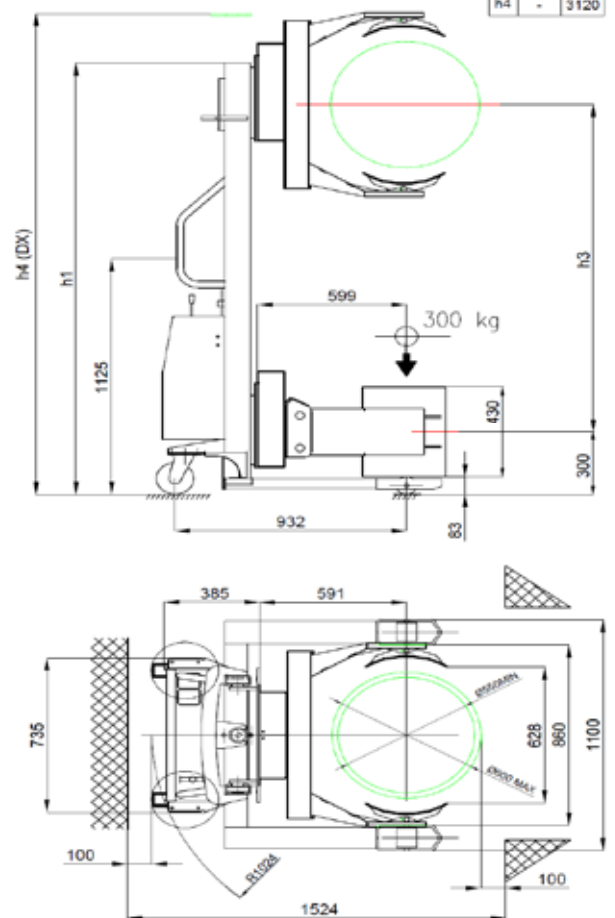


TGEX PRFI





TGEX PRFI

	mm	mm
h3	1560	2460
h1	2075	1890
h4	-	3120


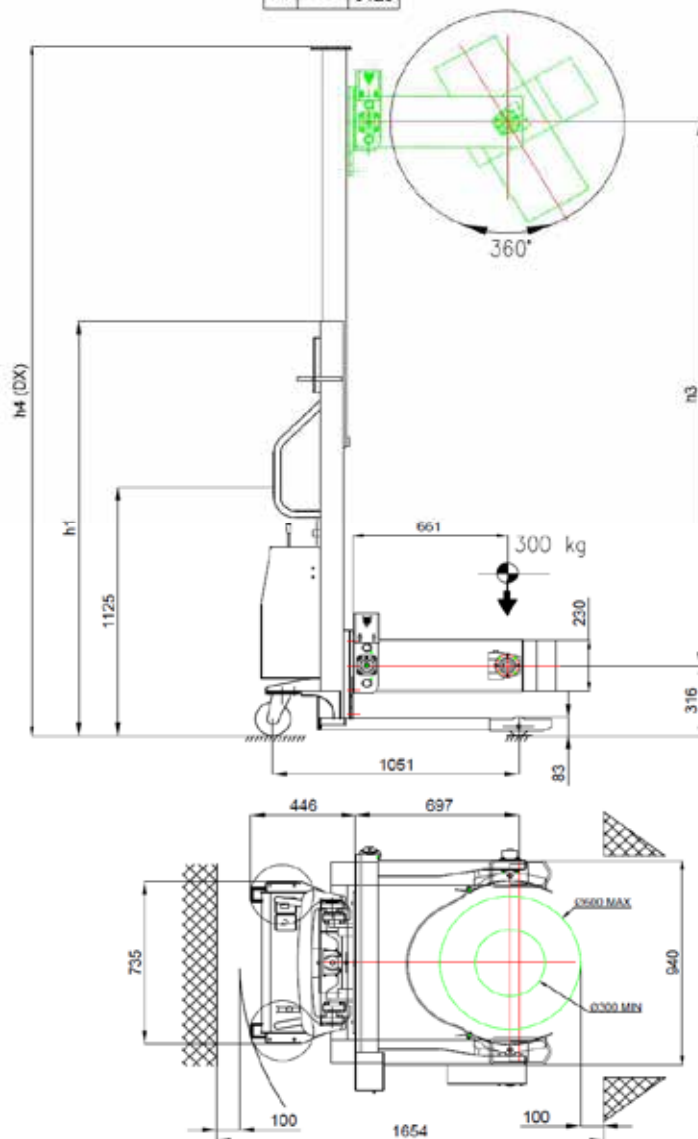


CMX 10 – 15

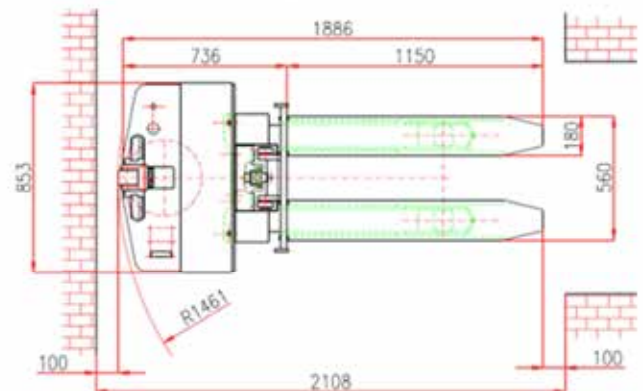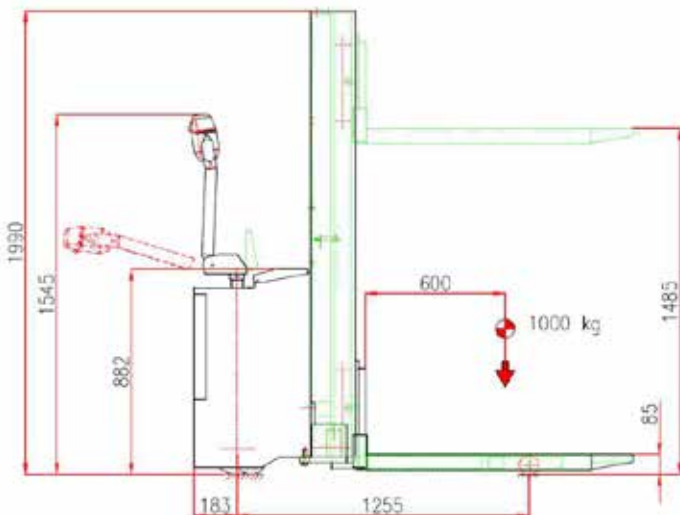

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS			
Modello	Manufacturer's type	Modèle	Modelo		CMX 10	CMX 15
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	1000	1500
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	600	600
Peso con batteria	Service weight incl. Battery	Poids avec batterie	Peso propio con batería	kg	690	730
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		NY / PU	NY / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas del.	mm	82 x 90	82 x 90
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm	250 x 80	250 x 80
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	125 x 40	125 x 40
N. ruote (x=motrice)	Wheels N. (x=driven)	N. roues (x=motrice)	Cantidad (x=motrices)	N.	2 / 2 + tx	2 / 2 + tx
MOTORE	E-MOTOR	MOTEUR	ACCIONAMIENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	ES 1,2	ES 1,2
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	DC 2,0	DC 2,0
Batteria GEL	GEL Battery	Batterie GEL	Bateria GEL	V/Ah	24 / 140	24 / 210
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	145	185
Raddrizzatore	Charger	Chargeur	Cargador	V/A	HF 16A	HF 30A


CBX 03 - PRFI

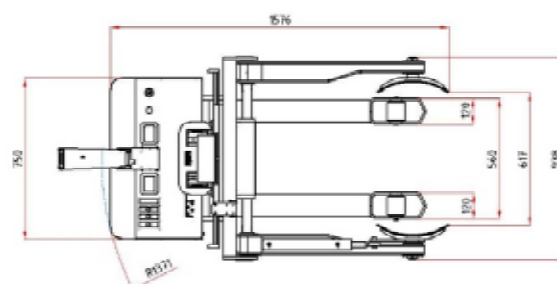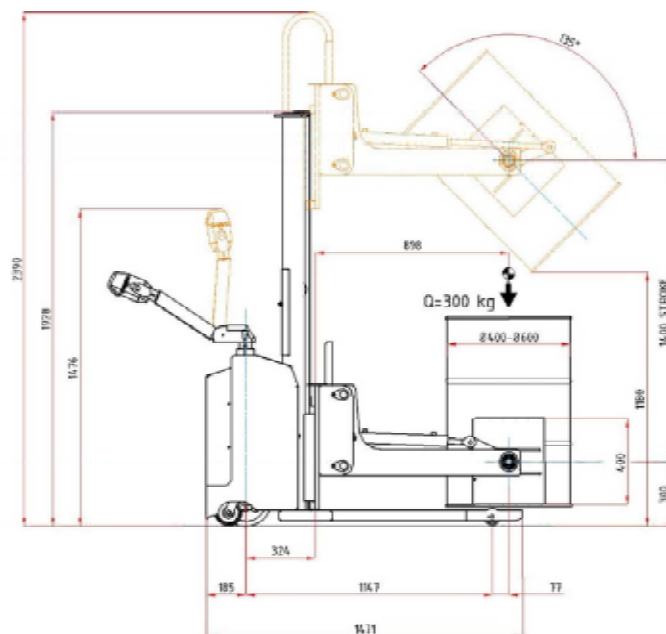

← **Option**
BATTERIA LITIO
LITHIUM BATTERY

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS		CBX - PRFI	CBX - FOR
Modello	Manufactur's type	Modèle	Modelo		300	600
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	300	600
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	600	600
Peso con batteria	Service weight incl. batt.	Poids avec batterie	Peso propio con batería	kg	580	490
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		NY / PU	NY / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas del.	mm	82 x 90	82 x 90
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm	250 x 80	250 x 80
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	125 x 40	125 x 40
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrice)	Cantidad (x=motrices)	Nr.	2 + 2 / 1x	2 + 2 / 1x
MOTORE	E-MOTOR	MOTEUR	ACCIONAMENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	1,2	1,2
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	0,8	0,8
Batteria GEL	GEL Battery	Batterie GEL	Batería GEL	V/Ah	2 x 12 / 100	2 x 12 / 100
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	60	60
Raddrizzatore	Charger	Chargeur	Cargador	V/A	HF 24V / 10A	HF 24V / 10A

CPX

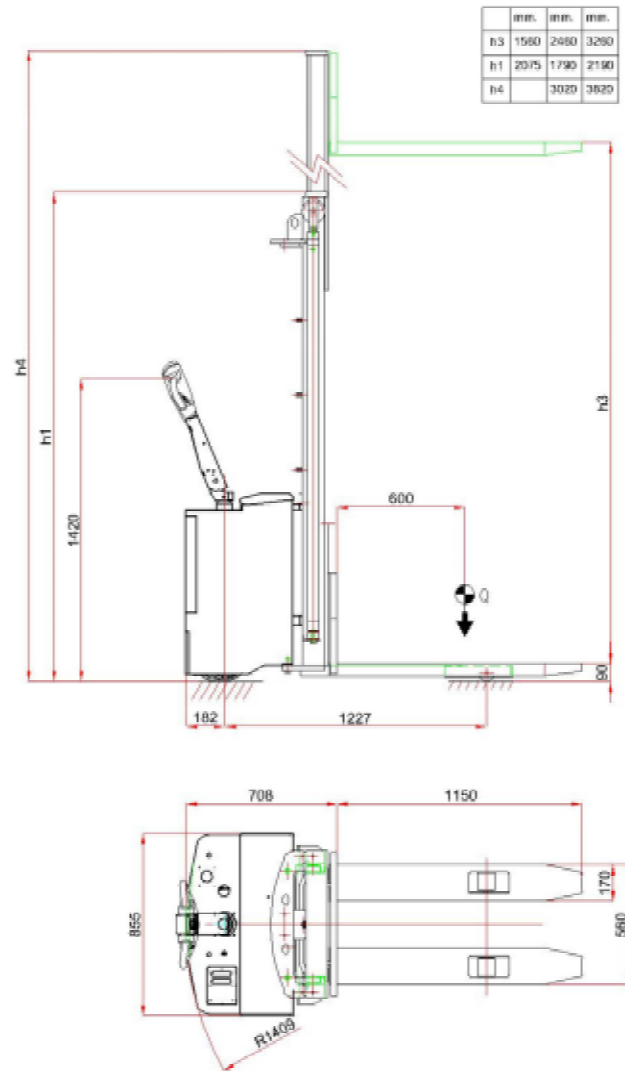

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS			
Modello	Manufactur's type	Modèle	Modelo		CPX 12	CPX 15
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	1200	1500
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	600	600
Peso con batteria	Service weight incl. Battery	Poids avec batterie	Peso propio con batería	kg	670-750-790	725-805-845
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		NY / PU	NY / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas del.	mm	82 x 90	82 x 70
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracción	mm	250 x 80	250 x 80
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	125 x 40	125 x 40
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrice)	Cantidad (x=motrices)	Nr.	2 / 2 + 1x	4 / 2 + 1x
MOTORE	E-MOTOR	MOTEUR	ACCIONAMENTO			
Motore trazione	Traction motor	Moteur de traction	Motor de tracción	kW	ES 1,2	ES 1,2
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevación	kW	DC 2,0	DC 2,0
Batteria GEL	GEL Battery	Batterie GEL	Bateria GEL	V/Ah	24 / 140	24 / 210
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	145	185
Raddrizzatore	Charger	Chargeur	Cargador	V/A	HF 24V / 16A	HF 24V / 30A

PEX 15 – INOX 304




PEX 10 – INOX 304



PEF 15



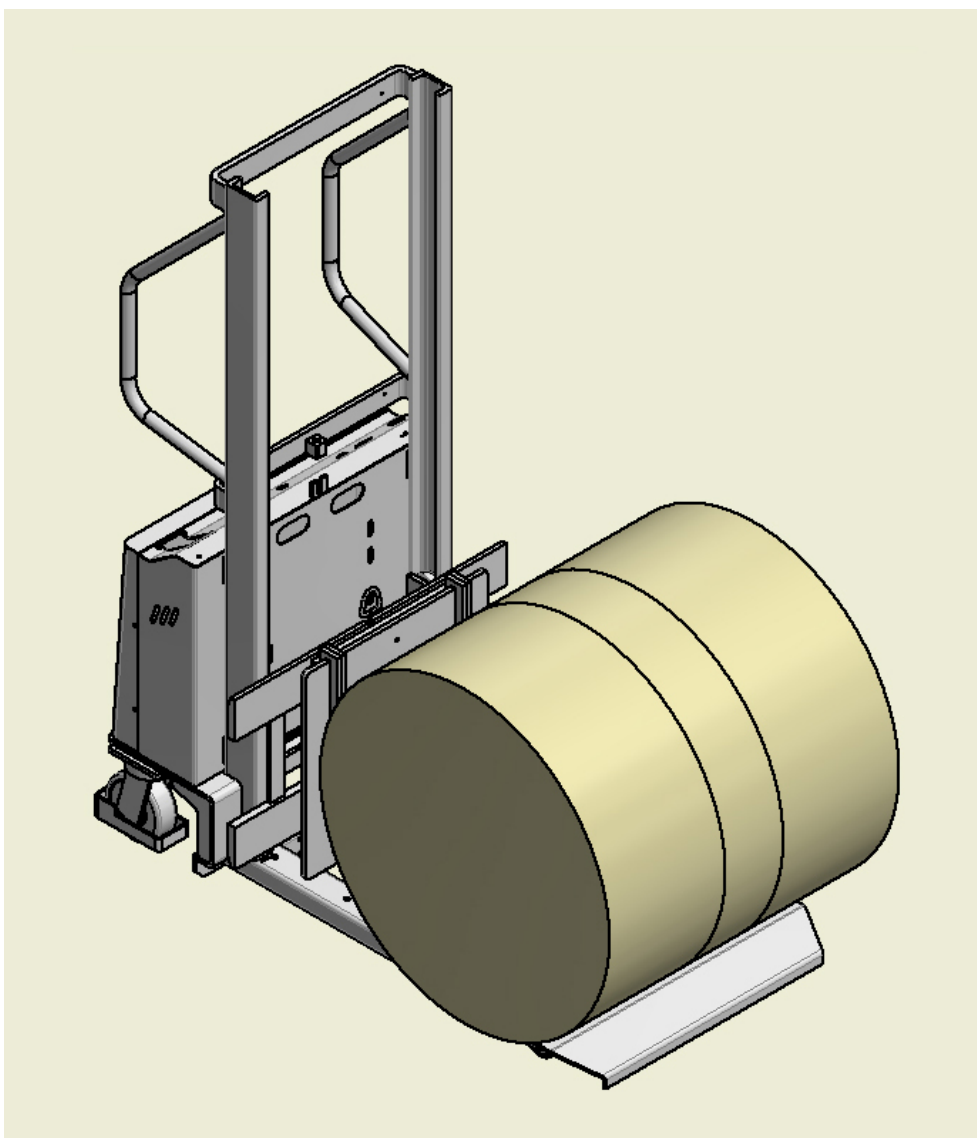

A F C Srl

Sede Legale : 20122 MILANO – Viale Regina Margherita , 30

Sede Operativa : 29017 Fiorenzuola (PC) – Via Gobetti , 4 Tel. 0523.349769

Ufficio Commerciale : 41012 Carpi (MO) – Via Bari , 12 Tel. 059.9771262

info@afchhandling.com – www.afchhandling.com