



CARREFFE

DATI TECNICI - TECHNICAL DATA-DONNEES TECHNIQUE-DATOS TECNICOS

AFC Srl Handling Equipment




20122 Milano - V.le Regina Margherita 30 +39 02 98876001

29017 Fiorenzuola (PC) - Via P. Gobetti 4 +39 0523 349769

info@afchhandling.com

www.afchhandling.com


CL 12 CBB

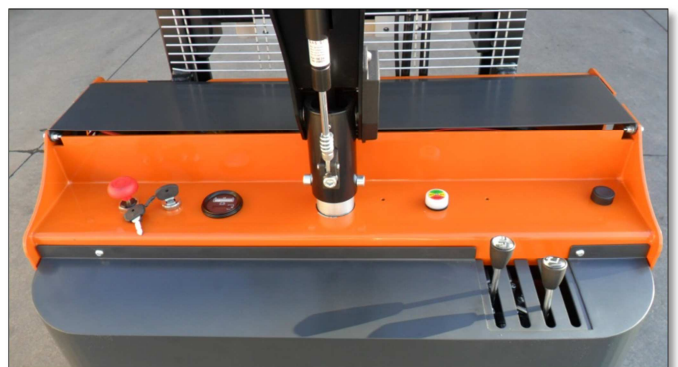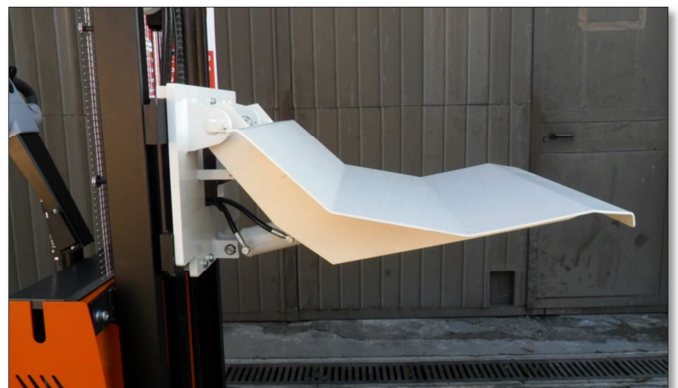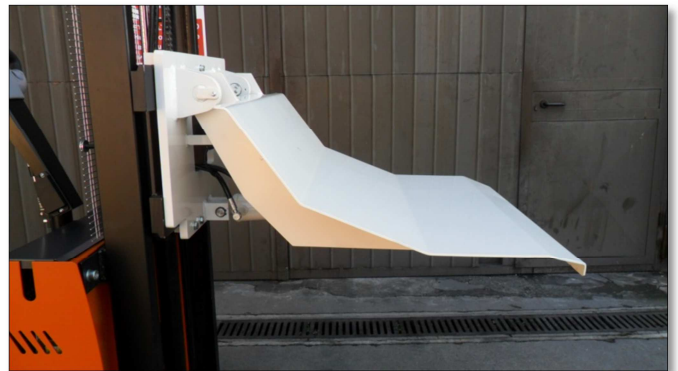



CL CBB

	mm	mm
h3	1160	1560
h1	1675	2075
h4	-	-

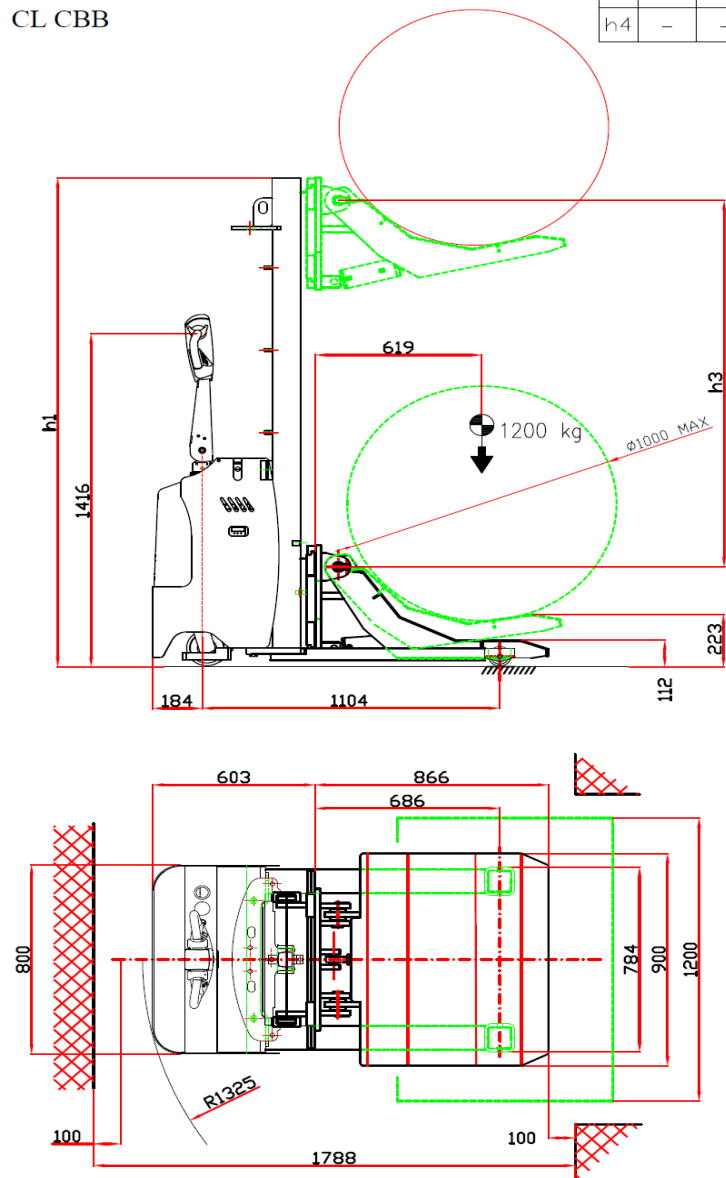

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS	
Modello	Manufactur's type	Modèle	Modelo	CL 12 CBB
Guida	Drive	Conduite	Accionamiento	Electric (batt)
Tipo di operazione	Type of operation	Type d'opération	Conduccion	Pedestrian
Portata	Load capacity	Capacité	Capacidad de carga	Q = 1200 Kg
Baricentro	Load centre	CDG	Centro de gravedad	C = 600 mm
Peso batt. incl.	Service weight incl. batt.	Poids avec batterie	Peso propio con batería	750 Kg
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS	
Ruote (ant/post)	Tyres	Roues	Bandajes (del/atr)	PU / PU
Dim. Ruote ant.	Tyres size, front	Roues avant	Dim. Ruedas del.	80x90 mm
Dim. Ruota trad.	Tyres size, drive	Roue motrice	Dim. Rueda tracciòn	250x80mm
Dim. Ruote addiz.	Addiotional wheels	Roues supplement.	Dim. Ruedas estabilizad.	150x50mm
N. ruote (x=motrice)	Wheels N. (x=driven)	N. roues (x=motrice)	Cantidad (x=motrices)	N. 2 + 2 / 1 x
PRESTAZIONI	PERFORMANCE DATA	PERFORMANCES	RENDIMIENTOS	
Velocità trazione	Traction speed (load/unl.)	Vitesse tract. (a/s charge)	Velocidad de traslación (c/s)	4,5/5,5 Km/h
Pendenza massima	Max gradient	Max pente	Pendiente	6 / 10 %
Freno	Service Brake	Frein de service	Frenado	Electric
MOTORE	E-MOTOR	MOTEUR	ACCIONAMIENTO	
MOTORE TRAZIONE	TRACTION MOTOR	MOTEUR DE TRACTION	MOTOR DE TRACCIÓN	MP 0,7 kW
MOTORE STERZO	STEERING MOTOR	MOTEUR DIRECTION	MOTOR DE DIRECCIÓN	-
MOTORE SOLLEVAMENTO	LIFTING MOTOR	MOTEUR DE LÉVAGE	MOTOR DE ELEVACIÓN	DC 2,2 kW
BATTERIA	BATTERY	BATTERIE	BATERIA	24 V / 150 AH
PESO BATTERIA	BATTERY WEIGHT	POIDS BATTERIE	POID BATERIA	125 Kg
RADDRIZZATORE	CHARGER	CHARGEUR INCORPORÉ	CARGADOR	HF 24V / 16A