

AFC Srl Handling Equipment

20122 Milano - V.le Regina Margherita 30 +39 02 98876001

29017 Fiorenzuola (PC) - Via P. Gobetti 4 +39 0523 349769

info@afchhandling.com





www.afchhandling.com



CMX10

CMX-PRLI



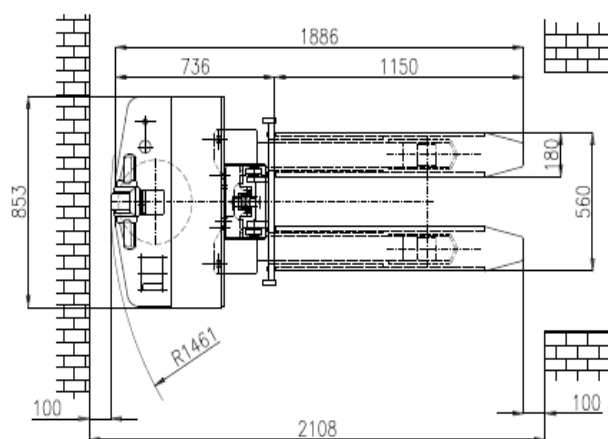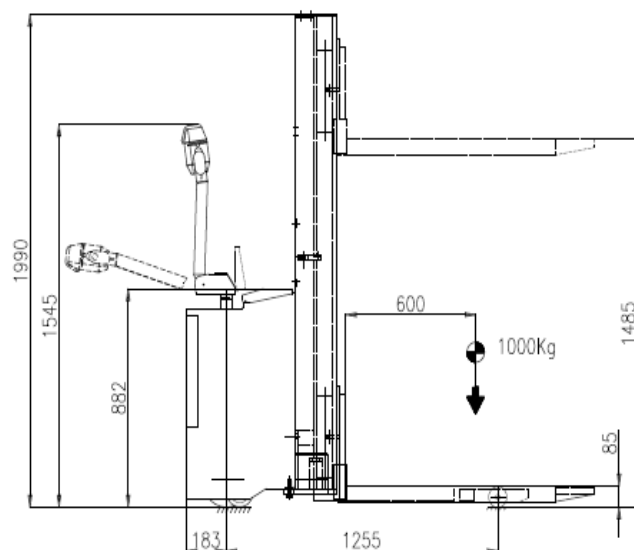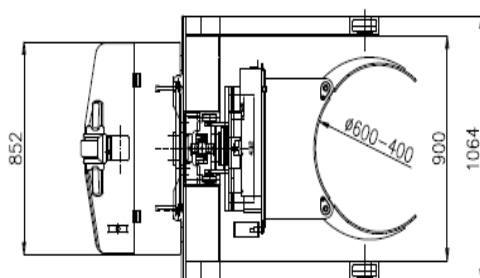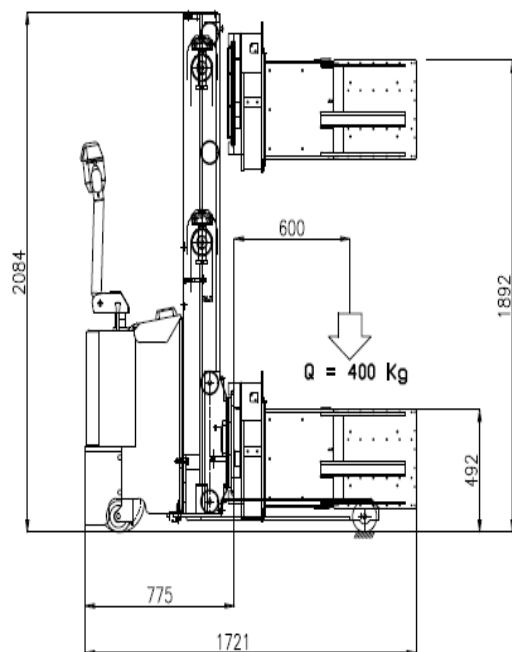

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS	
Modello	Manufacturer's type	Modèle	Modelo	CMX 10
Guida	Drive	Conduite	Accionamiento	Electric (batt)
Tipo di operazione	Type of operation	Type d'opération	Conduccion	Pedestrian
Portata	Load capacity	Capacité	Capacidad de carga	1,0 Q(t)
Baricentro	Load centre	CDG	Centro de gravedad	600 c(mm)
Peso batt. incl.	Service weight incl. batt.	Poids avec batterie	Peso propio con batería	540-620 Kg
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS	
Ruote (ant/post)	Tyres	Roues	Bandajes (del/atr)	PU / PU
Dim. Ruote ant.	Tyres size, front	Roues avant	Dim. Ruedas del.	80 x 90 mm
Dim. Ruota trad.	Tyres size, drive	Roue motrice	Dim. Rueda tracción	250 x 80mm
Dim. Ruote addiz.	Additional wheels	Roues supplement.	Dim. Ruedas estabilizad.	125 x 50mm
N. ruote (x=motrice)	Wheels N. (x=driven)	N. roues (x=motrices)	Cantidad (x=motrices)	N. 2 / 2 + 1x
PRESTAZIONI	PERFORMANCE DATA	PERFORMANCES	RENDIMIENOS	
Velocità trazione	Traction speed (load/unl.)	Vitesse tract. (a/s charge)	Velocidad de traslación (c/s)	4,0 / 5,5 Km/h
Pendenza massima	Max gradient	Max pente	Pendiente	6 / 10%
Freno	Service Brake	Frein de service	Frenado	Electric
MOTORE	E-MOTOR	MOTEUR	ACCIONAMIENTO	
MOTORE TRAZIONE	TRACTION MOTOR	MOTEUR DE TRACTION	MOTOR DE TRACCIÓN	MP 0,7 kW
MOTORE STERZO	STEERING MOTOR	MOTEUR DIRECTION	MOTOR DE DIRECCIÓN	-
MOTORE SOLLEVAMENT	LIFTING MOTOR	MOTEUR DE LÉVAGE	MOTOR DE ELEVACIÓN	DC 2,2 kW
BATTERIA	BATTERY	BATTERIE	BATERÍA	24 V / 140 AH
PESO BATTERIA	BATTERY WEIGHT	POIDS BATTERIE	POID BATERÍA	120 KG
RADDRIZZATORE	CHARGER	CHARGEUR INCORPORÉ	CARGADOR	HF 24 V / 16 A