



AFC Srl Handling Equipment

20122 Milano - V.le Regina Margherita 30

+39 02 98876001

29017 Fiorenzuola (PC) - Via Gobetti 4

+39 0523 349769

info@afchhandling.com

www.afchhandling.com




CP 07.25 - ARB





CP 07.25 ARB 76

Q	CAP	LB	HB
	kg	mm	mm
1	700	600	1880
2	600	800	1680
3	500	1000	1480

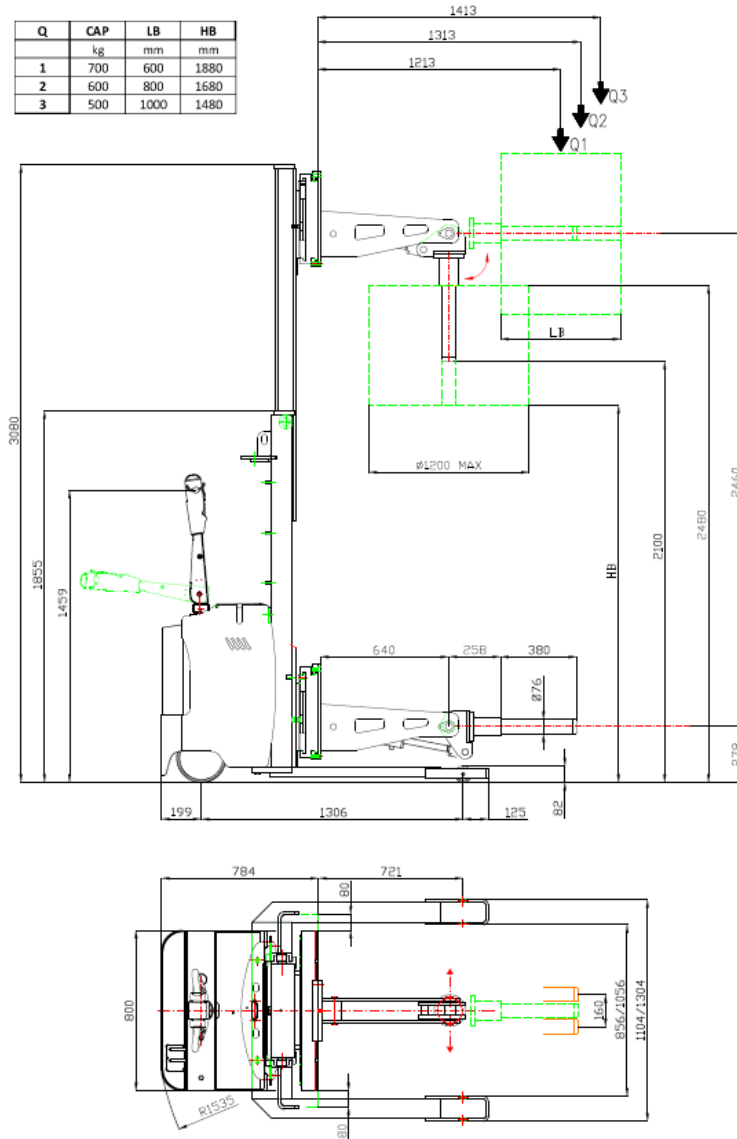

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS	
Modello	Manufacturer's type	Modèle	Modelo	CP07.25 ARB76
Guida	Drive	Conduite	Conduccion	Pedestrian
Tipo di operazione	Type of operation	Type d'opération	Accionamiento	Electric (batt.)
Portata	Load capacity	Capacité	Capacidad de carga	Q = 0,7 (t)
Baricentro	Load centre	CDG	Centro de gravedad	1200 mm
Peso batt. incl.	Service weight incl. batt.	Poids avec batterie	Peso propio con bateria	880 Kg
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS	
Ruote (ant/post)	Tyres	Roues	Bandajes (del/atr)	Poly / Rubber
Dim. Ruote ant.	Tyres size, front	Roues avant	Dim. Ruedas del.	80x90 mm
Dim. Ruote trad.	Tyres size, drive	Roue motrice	Dim. Rueda tracciòn	250x100mm
Dim. Ruote addiz.	Additional wheels	Roues supplement.	Dim. Ruedas estabilizad.	150x50mm
N. ruote (x=motrice)	Wheels N. (x=driven)	N. roues (x=motrice)	Cantidad (x=motrices)	Nr. 2 +2 / 1x
PRESTAZIONI	PERFORMANCE DATA	PERFORMANCES	RENDIMIENOTOS	
Velocità trazione	Traction speed (load/unl.)	Vitesse tract. (a/s charge)	Velocidad de traslaciòn (c/s)	3,5 / 4,5 Km/h
Pendenza massima	Max gradient	Max pente	Pendiente	6 / 10 %
Freno	Service Brake	Frein de service	Frenado	Electric
MOTORE	E-MOTOR	MOTEUR	ACCIONAMIENTO	
Motore trazione	Traction motor	Moteur de traction	Motor de tracciòn	DC 1,7 kW
Motore sterzo	Steering motor	Moteur direction	Motor de direcciòn	-
Motore sollevamento	Lifting motor	Moteur de lévage	Motor de elevaciòn	DC 2,2 kW
Batteria	Battery	Batterie	Bateria	24V / 240Ah
Peso batteria	Battery weight	Poids batterie	Poid bateria	210 Kg
Raddrizzatore	Charger	Chargeur incorporé	Cargador	24V / 30A