

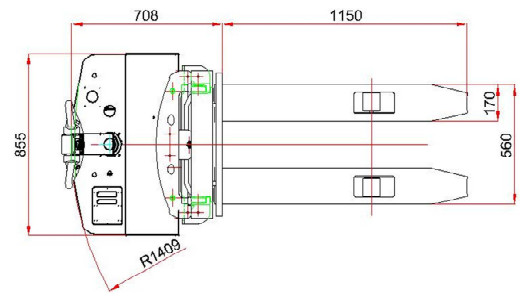


**CPX**

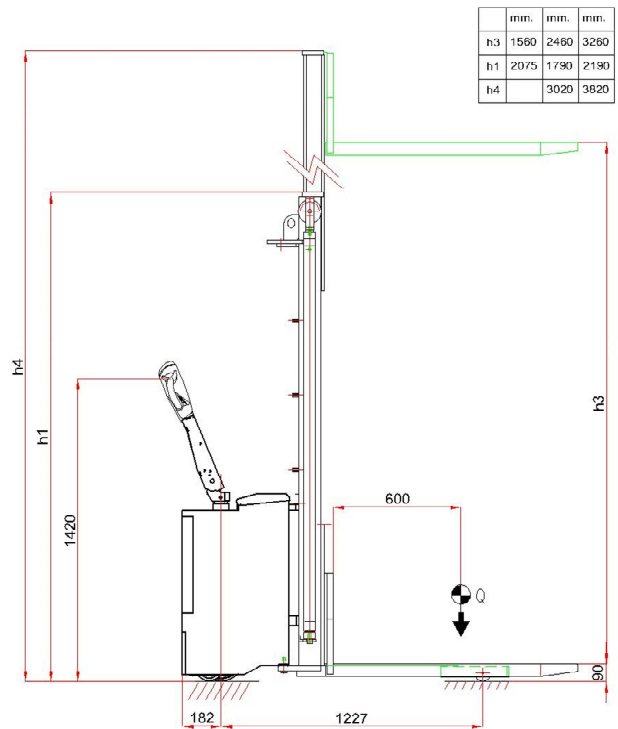

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS		CPX 12	CPX 15
Modello	Manufacturer's type	Modèle	Modelo			
Portata	Load capacity	Capacité de charge	Capacidad de carga	kg	1200	1500
Baricentro	Load centre	Centre de gravité	Centro de gravedad	mm	600	600
Peso con batteria	Service weight incl. Battery	Poids avec batterie	Peso propio con batería	kg	670-750-790	725-805-845
<b>RUOTE/TELAIO</b>	<b>WHEELS/CHASSIS</b>	<b>ROUES/CHASSIS</b>	<b>RUEDAS/CHASSIS</b>			
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)		NY / PU	NY / PU
Dim. Ruote anteriori	Front wheels size	Dim. Roues avant	Dim. Ruedas del.	mm	82 x 90	82 x 70
Dim. Ruota trazione	Drive wheel size	Dim. Roue motrice	Dim. Rueda de tracciòn	mm	250 x 80	250 x 80
Dim. Ruote pivotanti	Pivoting wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	mm	125 x 40	125 x 40
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrice)	Cantidad (x=motrices)	Nr.	2 / 2 + 1x	4 / 2 + 1x
<b>MOTORE</b>	<b>E-MOTOR</b>	<b>MOTEUR</b>	<b>ACCIONAMIENTO</b>			
Motore trazione	Traction motor	Moteur de traction	Motor de tracciòn	kW	ES 1,2	ES 1,2
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevaciòn	kW	DC 2,0	DC 2,0
Batteria GEL	GEL Battery	Batterie GEL	Bateria GEL	V/Ah	24 / 140	24 / 210
Peso batteria	Battery weight	Poids batterie	Peso batería	kg	145	185
Raddrizzatore	Charger	Chargeur	Cargador	V/A	HF 24V / 16A	HF 24V / 30A