



AFC Srl Handling Equipment


20122 Milano - V.le Regina Margherita 30 - +39 0298876001

41012 Carpi - Via Bari 12 - +39 0599771262

info@afchandlingequipment.com www.afchandlingequipment.com

CM GS-PBLI



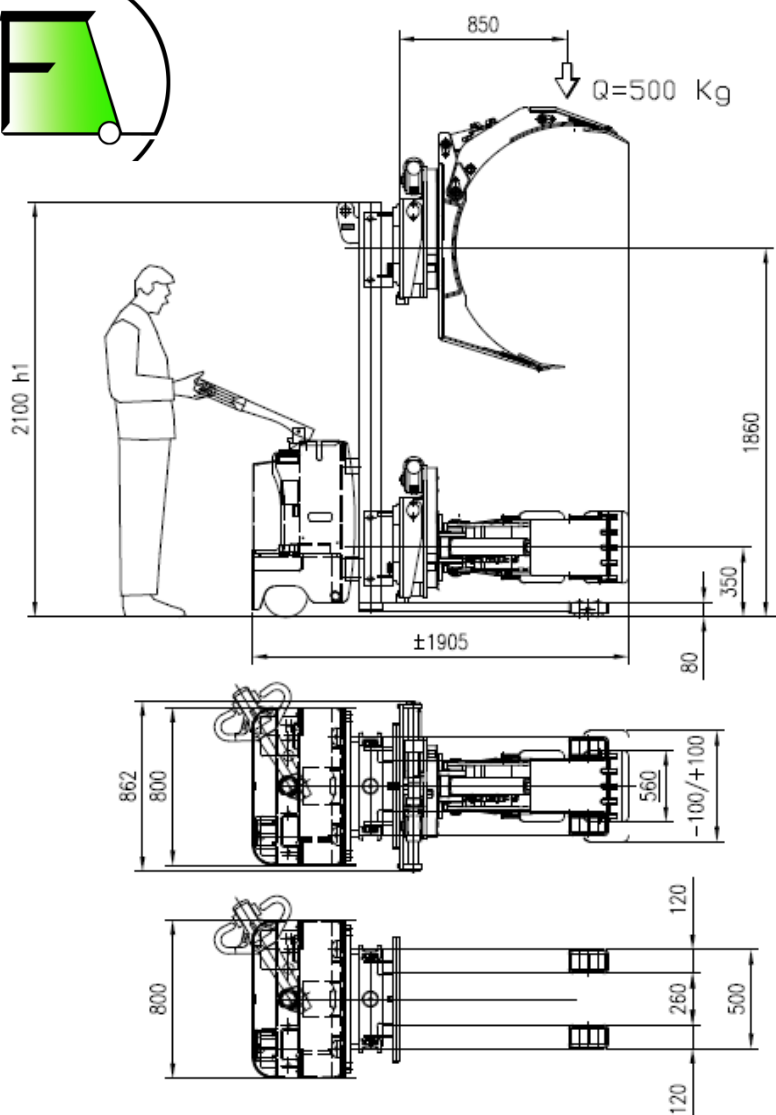

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS	
Modello	Manufacturer's type	Modèle	Modelo	CM GS
Guida	Drive	Conduite	Accionamiento	Electric (batt)
Tipo di operazione	Type of operation	Type d'opération	Conduccion	Pedestrian
Portata	Load capacity	Capacité	Capacidad de carga	0,5 Q(t)
Baricentro	Load centre	CDG	Centro de gravedad	850mm
Peso batt. incl.	Service weight incl. batt.	Poids avec batterie	Peso propio con bateria	860 Kg
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS	
Ruote (ant/post)	Tyres	Roues	Bandajes (del/atr)	poly/rubber
Dim. Ruote ant.	Tyres size, front	Roues avant	Dim. Ruedas del.	80x90 mm
Dim. Ruota trad.	Tyres size, drive	Roue motrice	Dim. Rueda tracción	250x80mm
Dim. Ruote addiz.	Additional wheels	Roues supplement.	Dim. Ruedas estabilizad.	150x50mm
N. ruote (x=motrice)	Wheels N. (x=driven)	N. roues (x=motrice)	Cantidad (x=motrices)	N. 2+2/1x
PRESTAZIONI	PERFORMANCE DATA	PERFORMANCES	RENDIMIENTOS	
Velocità trazione	Traction speed (load/unl.)	Vitesse tract. (a/s charge)	Velocidad de traslación (c/s)	3,5/4,5 Km/h
Pendenza massima	Max gradient	Max pente	Pendiente	5/8%
Freno	Service Brake	Frein de service	Frenado	Electric
MOTORE	E-MOTOR	MOTEUR	ACCIONAMIENTO	
MOTORE TRAZIONE	TRACTION MOTOR	MOTEUR DE TRACTION	MOTOR DE TRACCIÓN	MP 0,7 kW
MOTORE STERZO	STEERING MOTOR	MOTEUR DIRECTION	MOTOR DE DIRECCIÓN	-
MOTORE SOLLEVAMENT	LIFTING MOTOR	MOTEUR DE LÉVAGE	MOTOR DE ELEVACIÓN	DC 2,2 kW
BATERIA	BATTERY	BATTERIE	BATERIA	24V/180AH
PESO BATERIA	BATTERY WEIGHT	POIDS BATTERIE	POID BATERIA	150 KG
RADDRIZZATORE	CHARGER	CHARGEUR INCORPORÉ	CARGADOR	24V/16A