



**RF**  
**CARREFFE**

DATI TECNICI - TECHNICAL DATA-DONNEES TECHNIQUE-DATOS TECNICOS

**AFC Srl Handling Equipment**


20122 Milano - V.le Regina Margherita 30 +39 02 98876001

29017 Fiorenzuola (PC) - Via P. Gobetti 4 +39 0523 349769

[info@afhandling.com](mailto:info@afhandling.com)

[www.afhandling.com](http://www.afhandling.com)



**CL 12 CBB**

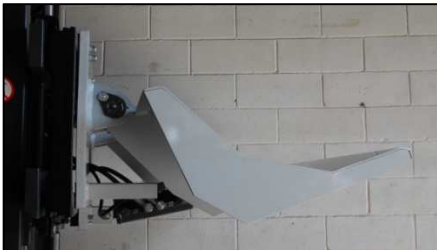



CL CBB

	mm	mm
h3	1160	1560
h1	1675	2075
h4	-	-

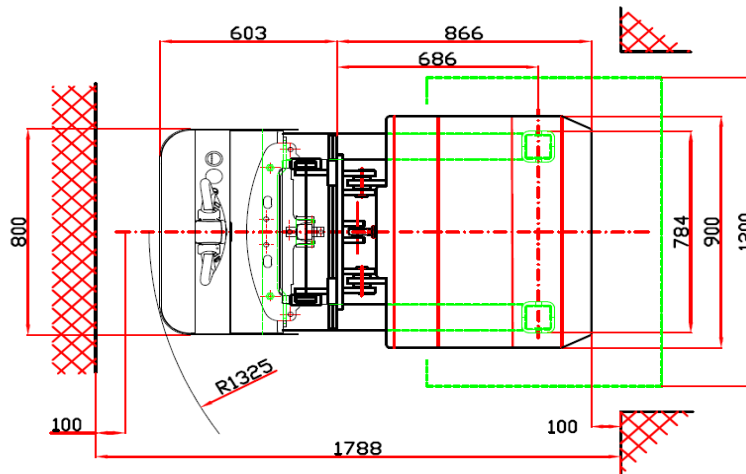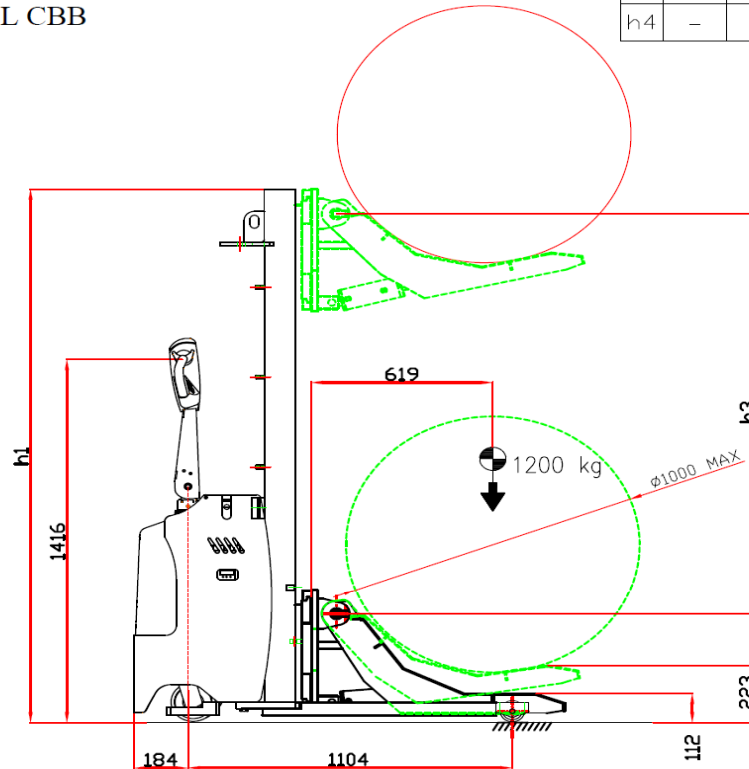

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS	
Modello	Manufacturer's type	Modèle	Modelo	<b>CL 12 CBB</b>
Guida	Drive	Conduite	Conduccion	Pedestrian
Tipo di operazione	Type of operation	Type d'opération	Accionamiento	Electric (Batt)
Portata	Load capacity	Capacité	Capacidad de carga	Q = 1200 Kg
Baricentro	Load centre	CDG	Centro de gravedad	C = 600 mm
Peso batt. incl.	Service weight incl. batt.	Poids avec batterie	Peso propio con bateria	750 Kg
<b>RUOTE/TELAIO</b>	<b>WHEELS/CHASSIS</b>	<b>ROUES/CHASSIS</b>	<b>RUEDAS/CHASSIS</b>	
Ruote (ant/post)	Tyres (front/rear)	Roues (avant/arrière)	Bandajes (delanteras/atras)	PU / PU
Dim. Ruote anteriori	Front Wheels size	Dim. Roues avant	Dim. Ruedas delanteras	80x90 mm
Dim. Ruota trazione	Drive Wheel size	Roue motrice	Dim. Rueda tracciòn	250x80mm
Dim. Ruote pivottanti	Pivoting Wheels size	Dim. Roues pivotants	Dim. Ruedas giratoria	150x50mm
Nr. ruote (x=motrice)	Wheels Nr. (x=driven)	Nr. roues (x=motrice)	Cantidad (x=motrices)	Nr. 2 + 2 / 1x
<b>PRESTAZIONI</b>	<b>PERFORMANCE DATA</b>	<b>PERFORMANCES</b>	<b>RENDIMIENTOS</b>	
Velocità trazione	Traction speed (load/unl.)	Vitesse tract. (a/s charge)	Velocidad de traslaciòn (c/s)	4,5/5,5 Km/h
Pendenza massima	Max gradient	Max pente	Pendiente	6 / 10 %
Freno	Service Brake	Frein de service	Frenado	Electric
<b>MOTORE</b>	<b>E-MOTOR</b>	<b>MOTEUR</b>	<b>ACCIONAMIENTO</b>	
Motore trazione	Traction motor	Moteur de traction	Motor de tracciòn	MP 0,7 kW
Motore sterzo	Steering motor	Moteur direction	Motor de direcciòn	-
Motore sollevamento	Lifting motor	Moteur de levage	Motor de elevaciòn	DC 2,0 kW
Batteria	Battery	Batterie	Bateria	24 V / 150 Ah
Peso batteria	Battery weight	Poids batterie	Poid bateria	125 Kg
Raddrizzatore	Charger	Chargeur incorporé	Cargador	HF 24V / 16A